


# RECYFIX®STANDARD 200

RECYFIX®STANDARD 200, class A 15, Type 010 with slotted grating, locked



A 15

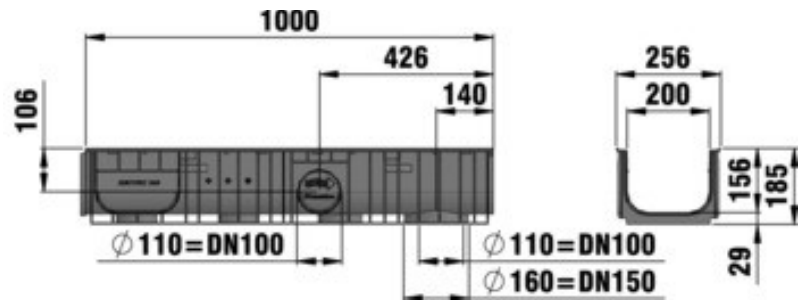

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Drainage cross-section cm <sup>2</sup>	Inlaying depth	Item-no.
1000	256	185	6,285	390	290	21	40648

## ■ Product description:

RECYFIX STANDARD 200 type 010 Channel made of recycled PE-PP acc. EN 1433, with lateral and vertical pipe connection possibility, with slotted grating, galvanised, locked, loading capacity A 15, L/W/H 1000x256x185 mm, item-no. 40648

## ■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Electrogalvanised steel
- **Locking handle:** Electrogalvanised steel
- **Grating:** strip galvanized steel

## ■ Type acc. DIN EN 1433:

M

## ■ Set of rules:

EN 1433

## ■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths



- School yards
- Underground car parks, multi-storey car parks
- Access drives private