



# RECYFIX®PRO 100

RECYFIX®PRO 100, class C 250, Type 75 with FIBRETEC design slotted grating, SW 9, black

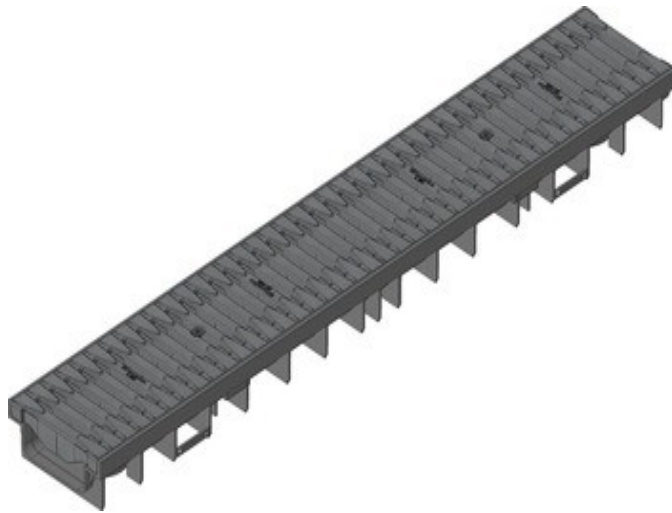

C 250

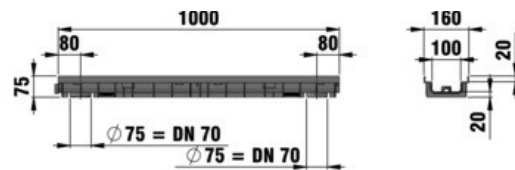

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Drainage cross-section cm <sup>2</sup>	Inlaying depth	Item-no.
1000	160	75	3,445	372	35	20	47062

## ■ Product description:

RECYFIX PRO 100 Type 75 - channel made of recycled PE-PP with integrated frame, acc. EN 1433, with vertical connection possibility, with FIBRETEC slotted grating, SW 9 mm, black, locked, loading capacity A 15 - C 250, L/W/H 1000x160x75, item-no. 47062

## ■ Material:

- **Channel body:** RECYFIX Material (recycled PP)
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** FIBRETEC Material (PA-GF 35)


## ■ Type acc. DIN EN 1433:

M

## ■ Set of rules:

## ■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value



- Cycle paths and footpaths
- School yards
- Access drives private